幅面代号
横:A2

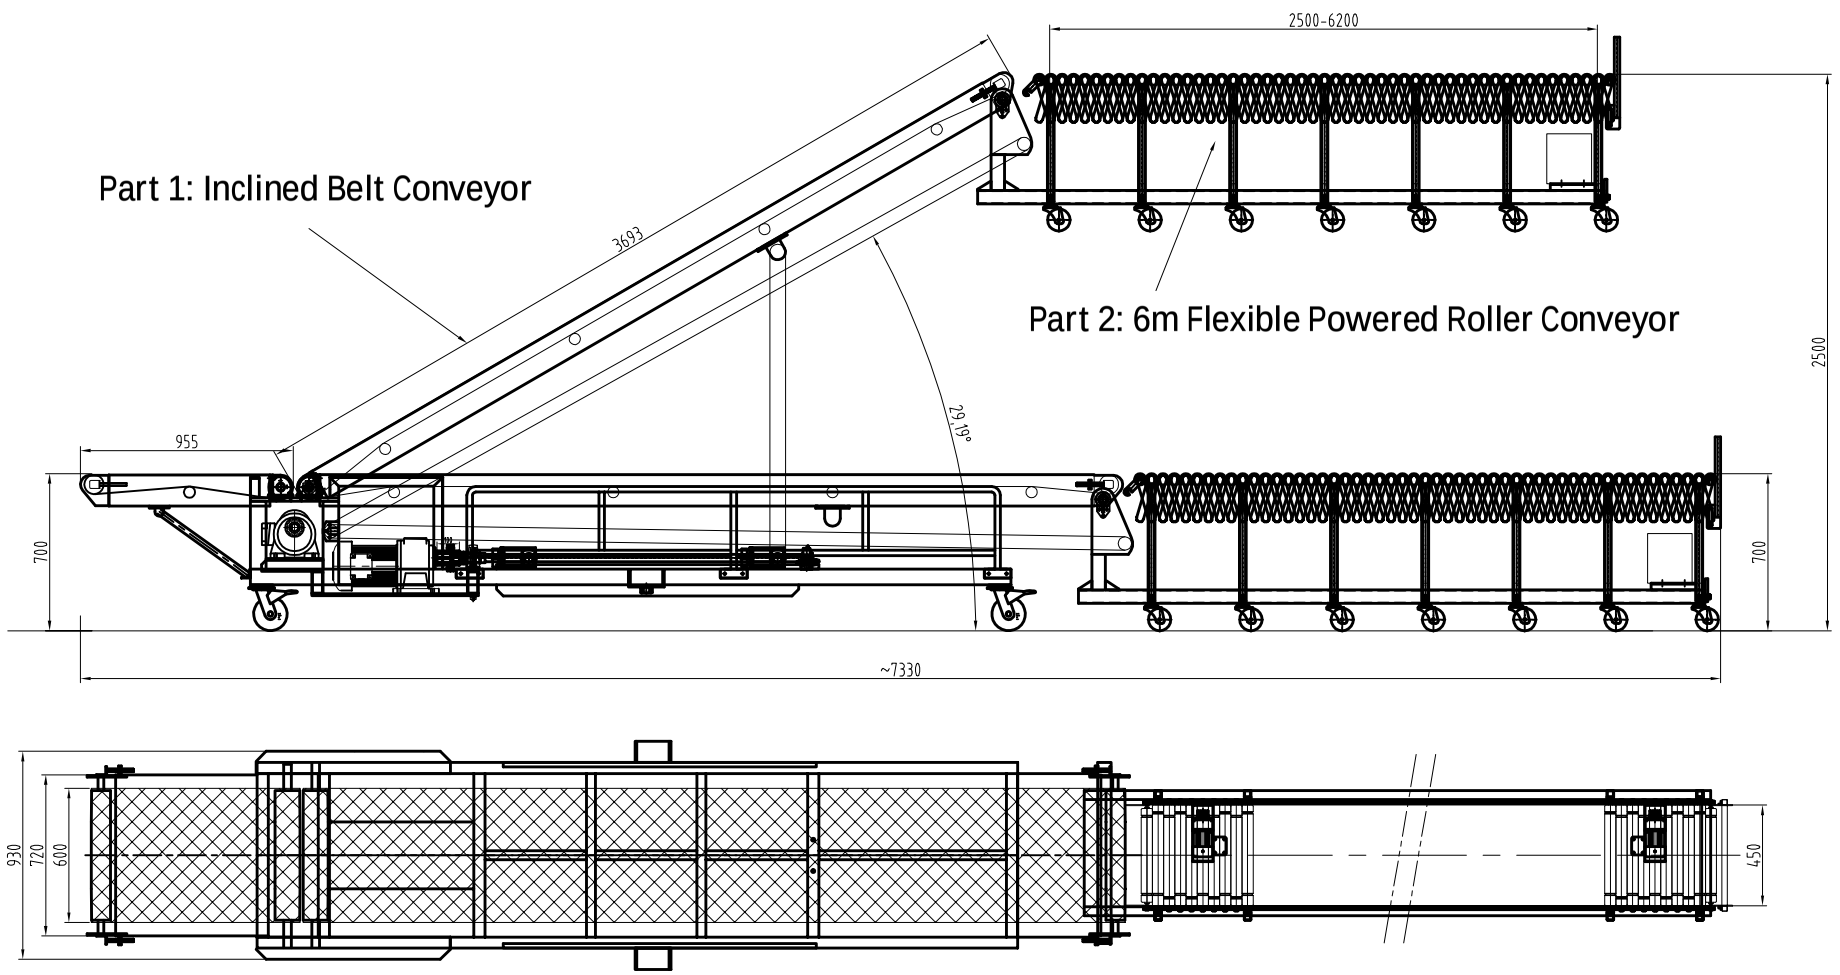

客户名称

Technical Parameters

Part 1: Inclined Belt Conveyor
1.Belt Specs:W=600mm,T=5mm,rough top PVC belt
2.Adjustable Speed:10-20m/min,foward & reverse
3.Adjustable Height:700-2500mm
4.Load Capacity:50kg/m
5.Lift Motor:2.2kw;Belt Motor:1.5kw
6.Power Supply:380V,3-PH,50Hz or 220V,1-PH,50Hz
7.Packing Size:L4700*W950*H700,3.13CBM,G.W.:680KGS

Part 2: 6m Flexible Powered Roller Conveyor
1.Rollers:Φ50*T1.5*L450mm galvanized steel grooved rollers
2.O-ring Belt:Φ5mm,L=275mm,SIEGLING PU belt
3.Motor:60w S.T.S motor,one motor per meter
4.Control Panel:Forward/Stop/Reverse,Speed Knob,Emergency Stop
5.Power Supply:from the socket on inclined belt conveyor
6.Adjustable Speed:10-18m/min,forward & reverse
7.Ajustable Height:700-1000mm
8.Load Capacity:40kg/m
9.Minimum carton length when full open:280mm
10.Packing Size:L2800*W600*H850,1.43CBM,G.W.:260KGS

						材料		YiFan Conveyor
标记	处数	分区	更改文件号	签名	年、月、日			
设计			标准化			比例	重量/Kg 数量	Truck Loading Conveyor
审核						比例	重量 数量	Model:TLC-G600-6S
工艺			日期			共 张 第 张		