GL17-P-035

Part 2 Flexible Powered Roller Conveyor, L7200*W600*H600/800mm

1. Rollers: Φ50 galvanized steel rollers
2. Motor: 90w*6pcs
3. Adjustable Speed: 10-18m/min, DELTA VFD
4. Load Capacity: 50KG/㎡
5. Wheels: Φ150mm swivel lockable PU wheels, Chinese brand
6. Frame Construction: T=3.5mm side links, galvanized
7. Legs: carbon steel, powder coated in BLACK

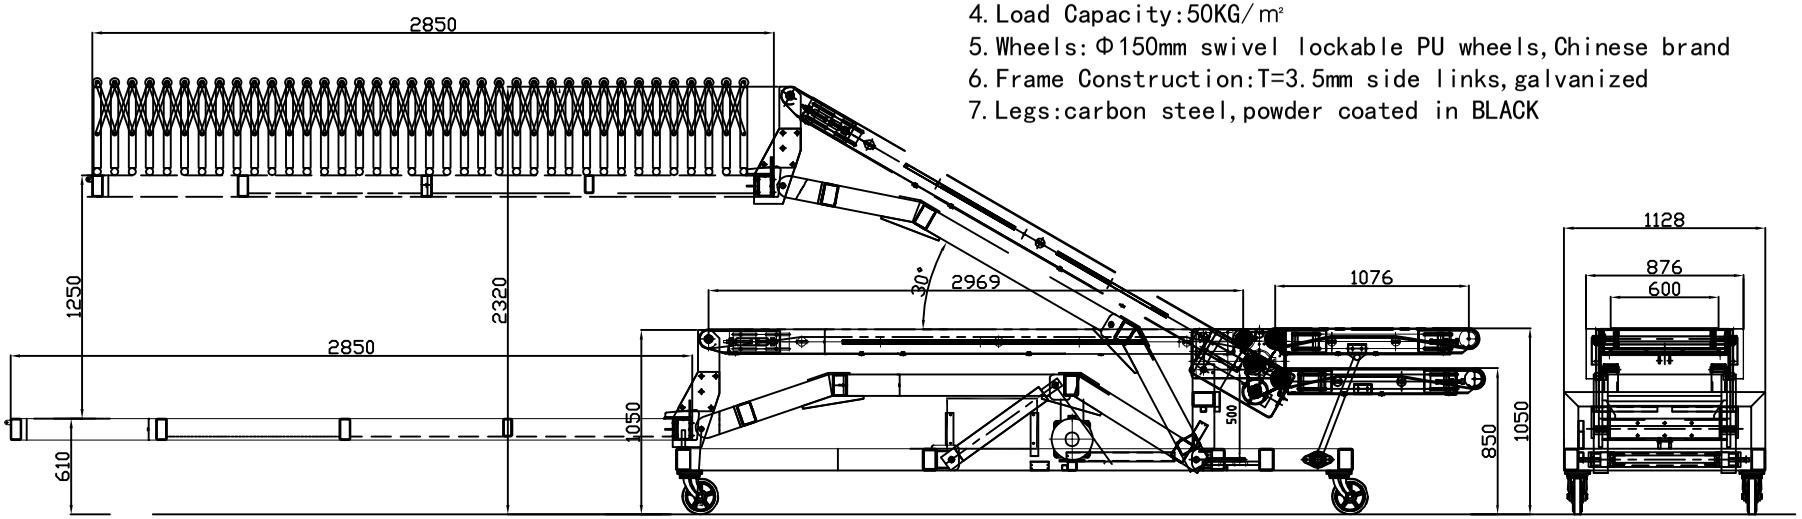

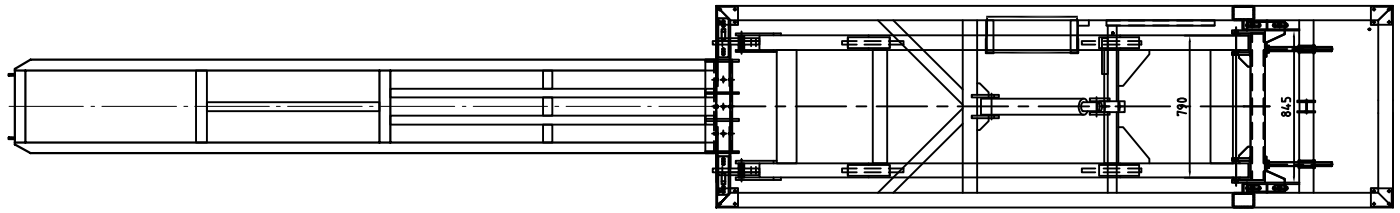

Part 1 Inclined Belt Conveyor

Technical Parameters

1. Belt: 5mm thick rough top GREEN PVC belt
2. Motor: 1.5kw, TAIWAN brand
3. Hydraulic System: 2.2kw, Chinese brand
4. Adjustable Speed: 10-20m/min, DELTA VFD
5. Main Electric Elements: SCHNEIDER
6. Load Capacity: 50KG/㎡
7. Wheels: Φ200mm heavy-duty swivel lockable PU wheels, Chinese brand
8. Frame Construction: carbon steel, powder coated in BLUE
9. Voltage: 380V, three phase, 50H

第一部分 爬坡皮带机

技术说明

1. 皮带：5mm绿色PVC爬坡带
2. 电机：1.5kw台湾品牌减速电机
3. 液压系统：2.2kw汇卑品牌
4. 变频调速：10-20m/min,台达变频器
5. 主要电气元件：施耐德
6. 输送能力：50KG/㎡
7. 脚轮：Φ200mmPU重型万向带刹脚轮国产优质
8. 机架：碳钢喷塑，蓝色
9. 电压：380V，三相，50H

第二部分 动力滚筒伸缩机

L7200*W600*H600/800mm

380V, 三相，50Hz

借通用件登?

描 ?

校 描

旧底??号

? 字

日 期

??	?数	更改文件号	?字	日期	方 案 图		YIFAN CONVEYOR EQUIPMENT
??		?准化			????	重量	数 量
							1
?核							Truck Loading Conveyor
工?		日期			共1?	第 1 ?	Model:CBLC-600