


Part 3 Flexible Gravity Skate Wheel Conveyor

Part 1 Inclined Belt Conveyor

Part 2 Flexible Powered Roller Conveyor

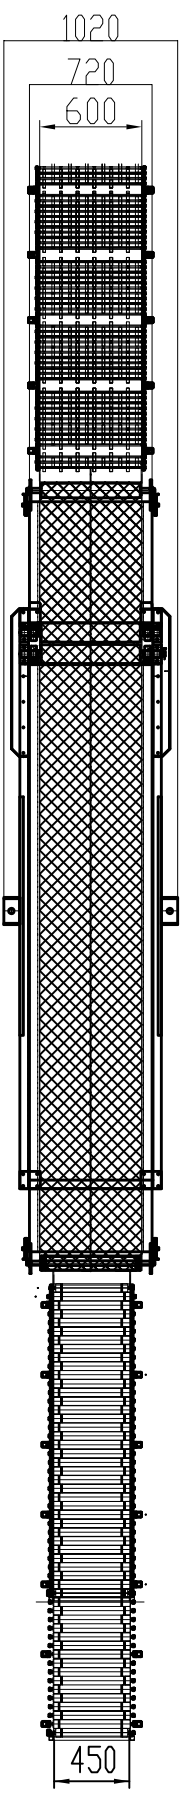

Technical Parameters

Part 1: Inclined Belt Conveyor

1. Belt Specs: W=600mm, T=5mm, rough top PVC belt
2. Adjustable Speed: 10-22m/min, forward & reverse
3. Adjustable Height: 700-2500mm
4. Load Capacity: 50kg/m
5. Belt Driven Motor: 1.5kw/Conveyor Lift Motor: 2.2kw
6. Power Supply: 380V/3-PH/50Hz or 220V/1-PH/50Hz

Part 2: Flexible Powered Roller Conveyor

1. Rollers: $\Phi 50$ *1.5*1.450mm galvanized steel grooved rollers
2. O-ring Belt: $\Phi 5$ mm high quality PU belt
3. Castors: 4" high quality swivel PU casters with brakes
4. Side Links: T=2mm with strengthened rib and reinforcing post channels
5. Adjustable Legs: 30*30*2mm galvanized steel tubes
6. Adjustable Speed: 10-18m/min two way
7. Motor Power: 60w per meter, total 360w
8. Voltage: 380V/3-PH/50Hz or 220V/1-PH/50Hz
9. Load Capacity: 40kg/m
10. Control Panel: Forward/Stop/Reverse/Emergency Stop
11. When rollers fully opened, caron length should be more than 280mm

Part 3: Flexible Gravity Skate Wheel Conveyor

1. Wheels: $\Phi 49$ steel or plastic wheels
2. Frame Construction: carbon steel/galvanized
3. Load Capacity: 50kg/m

YIFAN CONVEYOR		
Truck Loading Conveyor		
TLC-P600-6M		